




CommunityWasteDisposal.com  
Since 1984

## **Commercial Trash and Recycling Guidelines**

- Customer warrants that the container service area and all right-of-ways for servicing equipment, is sufficient to bear the weight of all equipment/vehicles required to perform the designated services. (Commercial Vehicle gross weight is 54,000 lbs, axle weight is 20,000 lbs with a 10,000 lb single wheel load). All container service areas must be on flat level surfaces.
- Customer warrants that any right-of-way provided for servicing equipment is of sufficient width (minimum 12' width with sufficient swept path clearances to negotiate turns, entrances/exits, etc.) and length to provide access of all equipment, vehicles and personnel access, required to perform the designated services. (Commercial Vehicle length is 33 feet with a 210-inch wheelbase for Front Load trucks and a 278-inch wheelbase for Roll Off trucks. Turning radius is 78 feet Front Load/Side Load and 84 feet Roll Off). There must be 70 feet of unobstructed approach (truck length + approach clearance) in front of each container for Front Load/Side Load service and 100 feet unobstructed approach (truck length + service clearance) for Roll Off container service.
- Customer warrants that any right-of-way provided for servicing equipment is free from all obstructions that may interfere with servicing the container, including sufficient vehicle/driver access clearance areas and unobstructed visibility. Note: CWD is not responsible for damage to ceilings, roofs, wires, or other obstructions with insufficient clearances. Overhead ceilings, roofs, wires, or other obstructions must be a minimum of 14 feet above ground/service level at the lowest point on approach, and 25 feet of unobstructed clearance above the service location. (Some configurations may require additional clearance space). All enclosures/containers should be located to minimize backing. Landscaping/vegetation must be planted with consideration for future growth potential.
- CWD is not responsible for damage caused to automatic vehicular gates if they close against the service vehicle during entry/exit. Property access barriers, including automatic vehicular gates/arms, should be equipped with a reversing Inherent Entrapment Sensing System (ground loop, magnetic, eye sensor, or other) installed, capable of detecting vehicles in both opening and closing cycles to prevent gate closure on entrapped vehicles. Due to increased risk of entrapped vehicles, vehicular gates with split entry/exit sides that swing in opposite directions from each other are not allowed. Gates/arms must have sufficient time allowed for slow-moving vehicle entrance/exit. (Recommended minimum duration of 15 seconds). Proper access codes or remote activation device must be provided for service access.
- Front Load/VIP Enclosures must contain a minimum of 10 feet x 10 feet inside dimensions (*two containers in shared enclosure must be a minimum of 20 feet wide*) to provide reasonable safe clearance for servicing. Access doors/gates must be mounted to provide a minimum 10 feet wide unobstructed opening to the enclosure (*20 feet for two containers in shared enclosure*), have a 120-degree swing opening radius, and must be securable in both the open and closed positions. Bollards or concrete wheel stops are recommended to prevent containers from being capable of coming into contact with the back of the enclosure (see Enclosure Requirements diagram).
- Side Load Enclosures must be a minimum of 8 feet wide by 8 feet deep to provide reasonable safe clearance for servicing. Access gates/doors must be a minimum of 8 feet wide with a 180-degree swing opening and be capable of being secured in both the open and closed positions.
- Roll-Off Enclosures must provide a minimum of 2 feet clearance on each side and 2 feet clearance in the front and rear of the container. Access gates/doors must be a minimum of 12 feet wide with a 120-degree swing opening and be capable of being secured in both the open and closed positions. (Roll-Off Non-RC= 12' Wide x 27' Deep, RC units= 13' Wide x 37' Deep).
- All enclosure hardware (including access gates/doors) must be of sufficient design and strength to accommodate repetitive use. Metal enclosure gates require three or more hinges to adequately support the weight of the gates over the lifetime of the enclosure. Regular inspections and maintenance should be performed to ensure proper operation and to prevent hardware failure.







- Additional equipment, containers, or other items stored inside the enclosure must be kept a minimum of 2 feet away from each side, and 3 feet away from the rear of the dumpster container and separated from the 10' x 10' required dumpster space by bollards.
- All containers without enclosures must have a 3-foot obstruction-free clearance zone surrounding the service area. This includes vehicles, poles, buildings, and any other obstructions. Containers located behind overhead/roll up doors are subject to the same minimum clearance requirements as containers inside enclosures.
- Containers on casters may not exceed 4 yards in size and must be limited to a required maneuverable distance of less than 50 feet. A smooth, flat, paved, and level surface must be provided for all pathways the container must be maneuvered and will be expected to travel.
- Custom installed containers (container on docks, stands, casters, railing, etc.) or other non-standard enclosures/container service areas (containers located inside buildings or under roof, etc.) must provide safe access to and from the service area, and safe clearance around the container in all directions. *Custom installed containers may require additional clearances.* Pre-construction review or site inspection is recommended.
- All trash/recycle items must fit inside the container. CWD is not responsible for damage caused by (or from) items left outside or on top of the container, or damage caused from servicing overloaded/overweight containers. Customers are responsible for citations resulting from servicing/transporting overloaded/overweight containers.
- Building developer must assure that all additional enclosure dimensions and construction material meet the construction requirements of the local City Land Development Code. Customers with enclosures that will also be housing other non-trash/recycle serviceable containers (grease traps, oil containers, special waste, etc) must provide additional space to accommodate bollards to separate the regular trash/recycle container and the other container, plus a two foot clearance (on each side) between the bollards and both containers. All drains/covers located inside the enclosure must have prior approval from the City. All enclosures walls must be 8 foot minimum height and uncovered (open to the sky). To ensure compliance with the above guidelines, a plan review or site inspection is recommended.

## Basic Enclosure Requirements

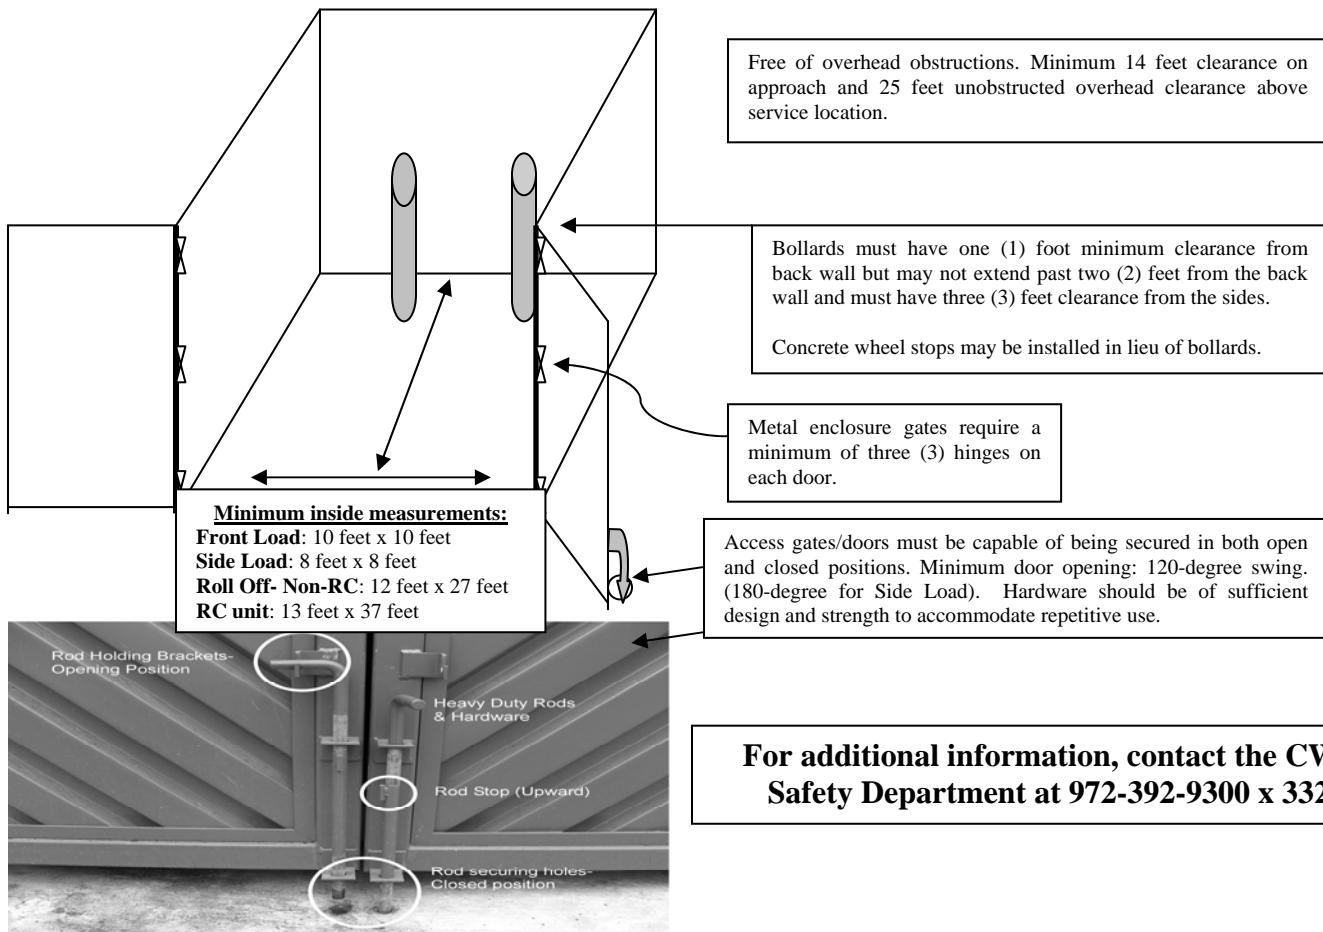







# FRONT LOADING CONTAINERS

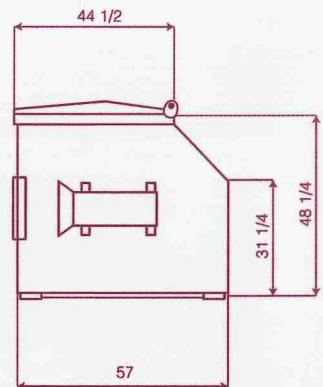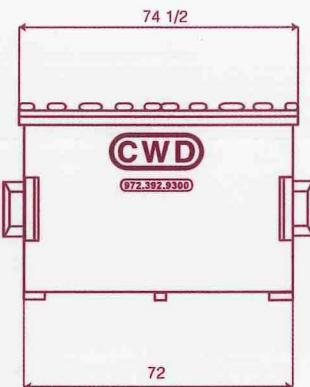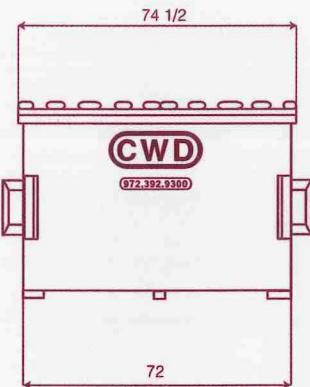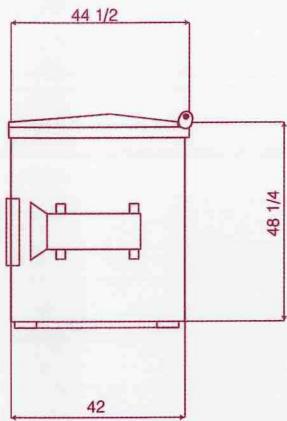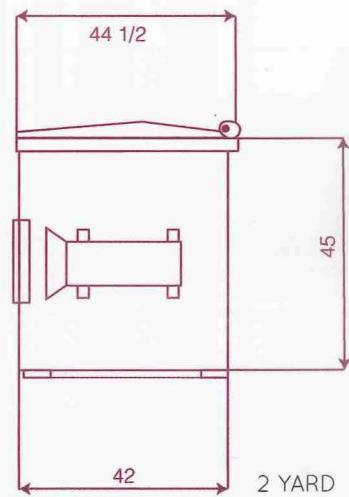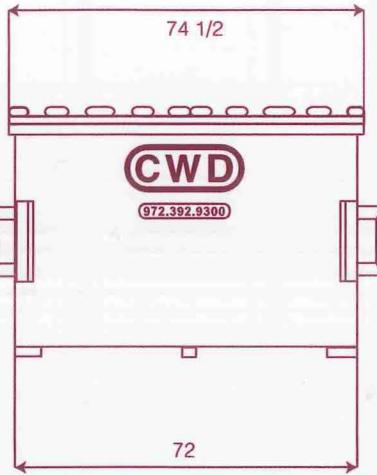



3 YARD

4 YARD

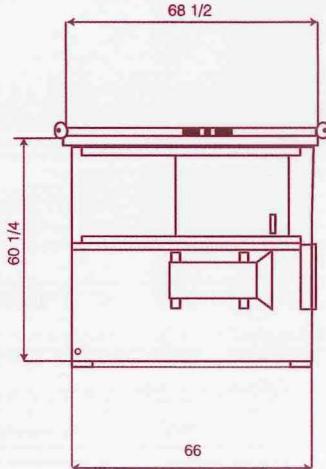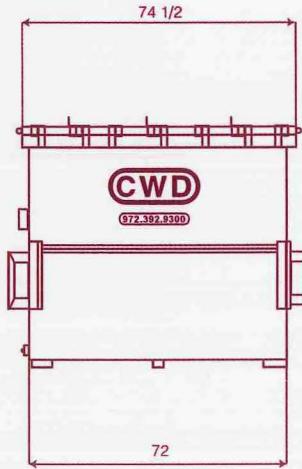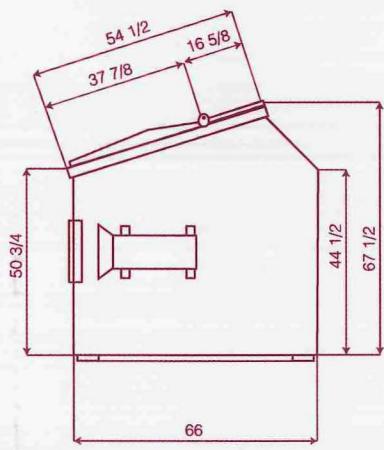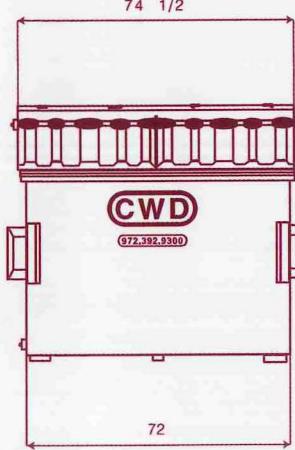

6 YARD SLANT

6 YARD

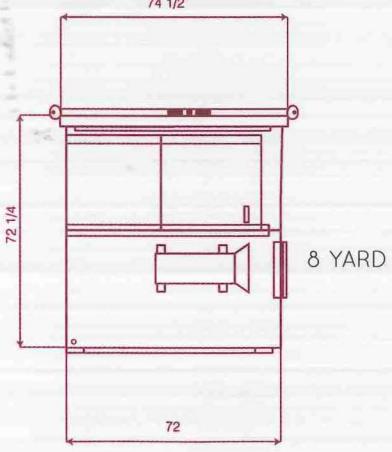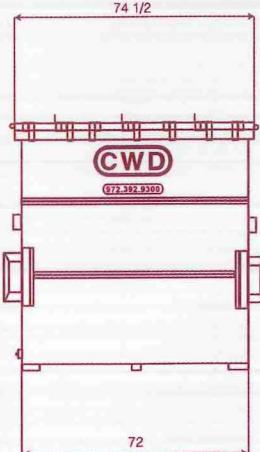


8 YARD


All containers are manufactured from the highest quality materials to provide years of dependable service. Different styles are available and can be tailored to your waste disposal needs.



Community Waste Disposal.com  
Since 1984

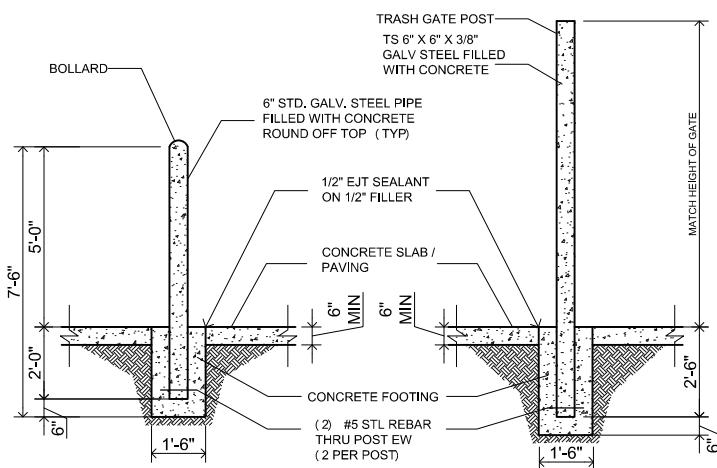


**BOLLARD/POST  
BASE**

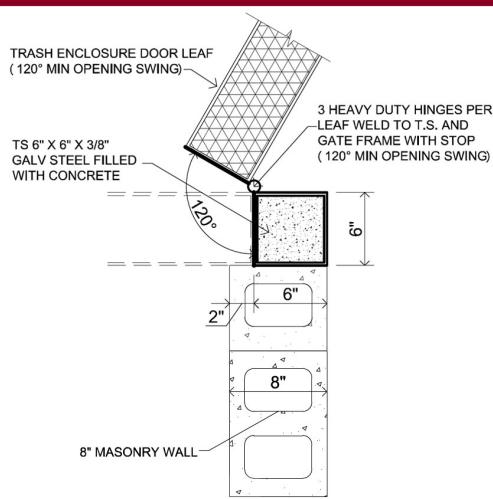


**HINGE DETAIL**


SCALE: 3/4" = 1'

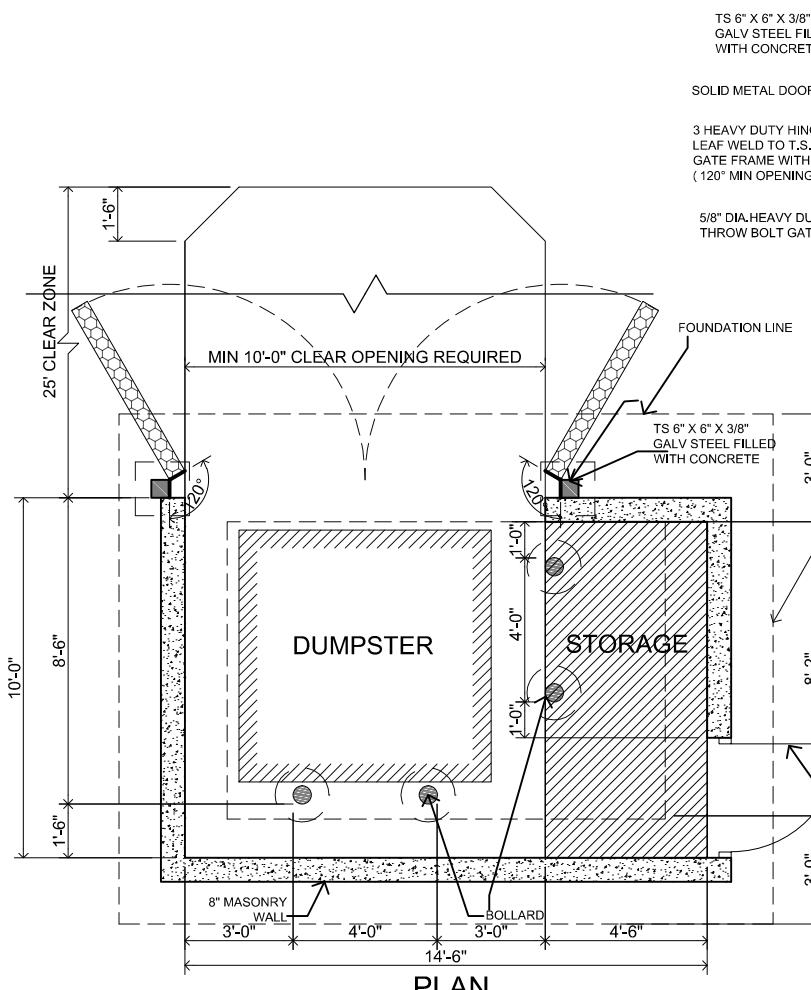

**PLAN**

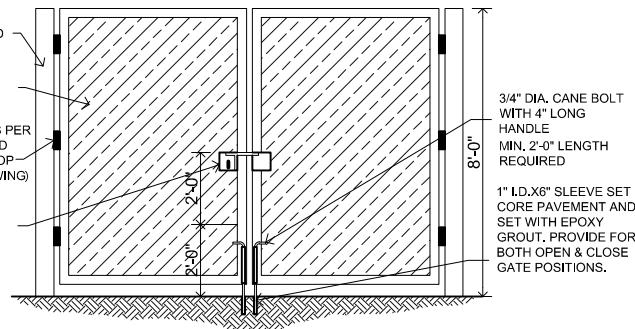

**CANE BOLT DETAIL**

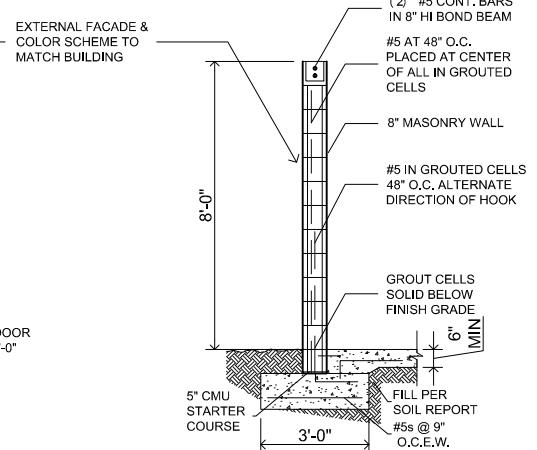

**SECTION**

**The information in this report is confidential and may be legally privileged. It is intended solely for the internal use of Community Waste Disposal, L.P. (CWD). Access to the information contained within this report by anyone else is unauthorized. Any disclosure, copying, distribution or action taken or omitted based on this information is prohibited and maybe unlawful.**



Community Waste Disposal.com  
Since 1984  
2010 California Crossing Road  
Dallas, Texas 75220-2310  
Telephone 972.392.9300 • 817.795.9300  
Facsimile 972.392.9301






**SINGLE DUMPSTER  
WITH STORAGE**

**AUGUST 23 2018**

**GUIDELINES  
SCALE: 3/16" = 1"**

**SRG Architects, LLC**  
TBAE FIRM #B2 2117  
www.sanroggroup.com  
Ph: 682.708.3161  
6421 Camp Bowie Blvd., Suite 312  
Fort Worth, Texas 76116  
Copyright © 2018 SRG Architects, LLC



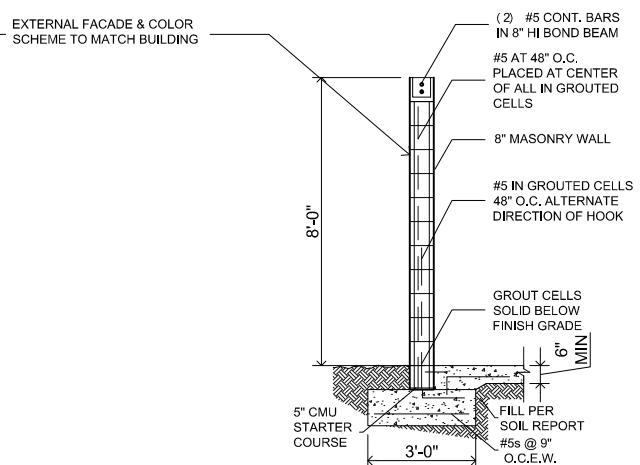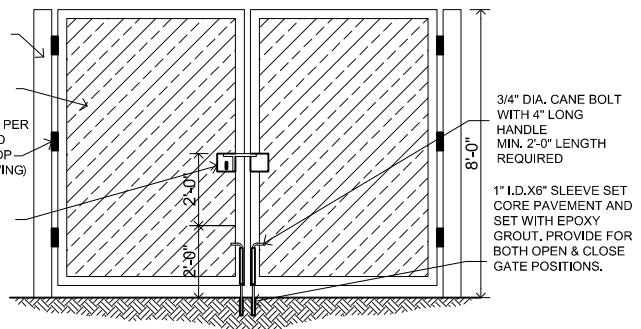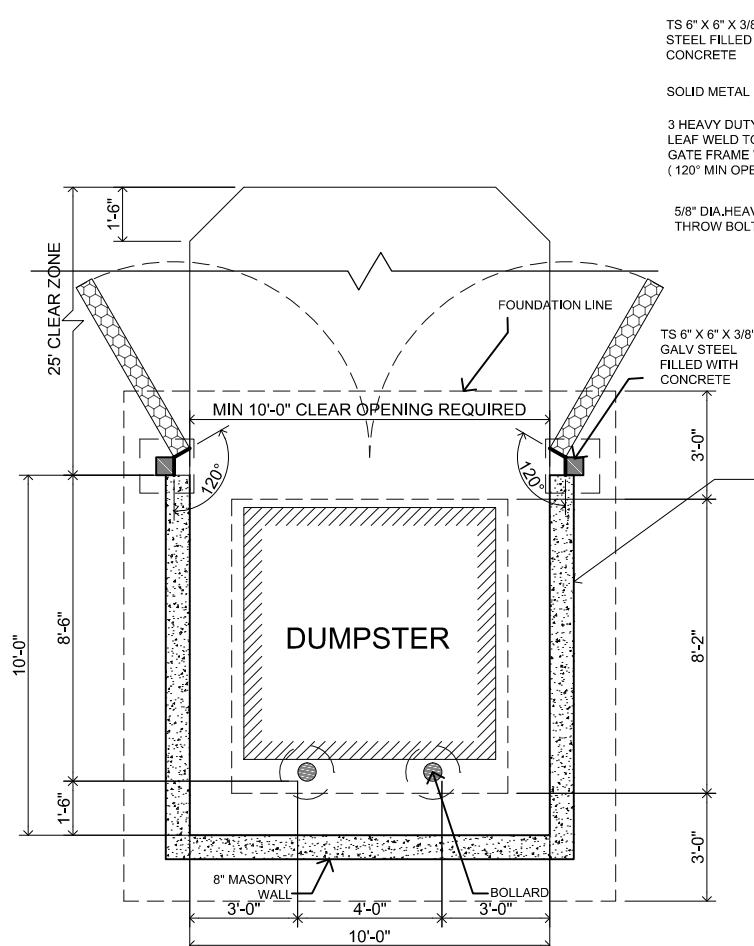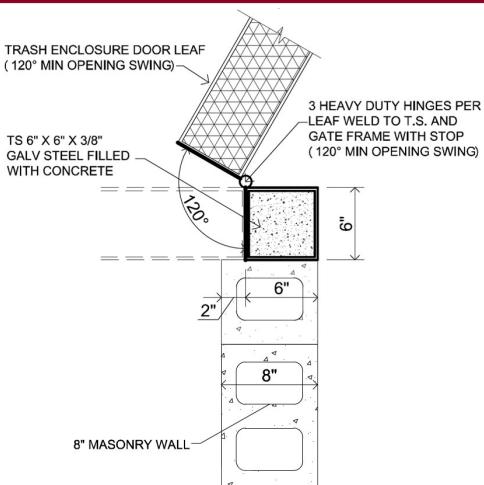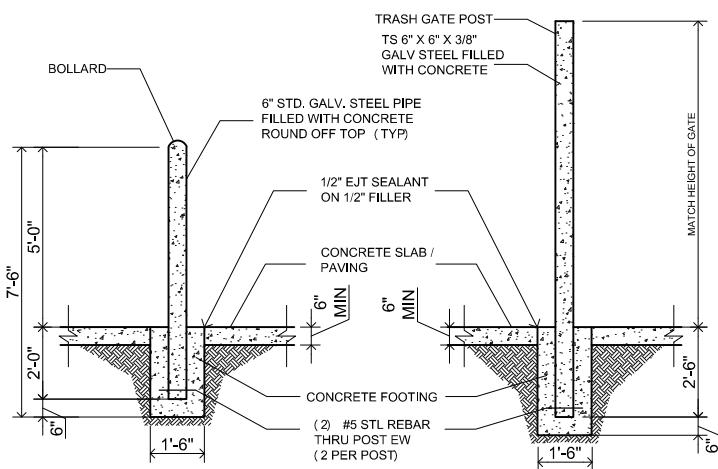

The information in this report is confidential and may be legally privileged. It is intended solely for the internal use of Community Waste Disposal, L.P. (CWD). Access to the information contained within this report by anyone else is unauthorized. Any disclosure, copying, distribution or action taken or omitted based on this information is prohibited and maybe unlawful.



CommunityWasteDisposal.com  
Since 1984  
2010 California Crossing Road  
Dallas, Texas 75220-2310  
Telephone: 972.392.9300 • 817.795.9300  
Facsimile: 972.392.9301


#### SINGLE DUMPSTER

AUGUST 23 2018


**GUIDELINES**  
SCALE: 3/16" = 1'

**SRG Architects, LLC**  
TBAE FIRM #B2 2117  
www.sanroggroup.com  
Ph: 682.708.3161  
6421 Camp Bowie Blvd., Suite 312  
Fort Worth, Texas 76116  
Copyright © 2018 SRG Architects, LLC



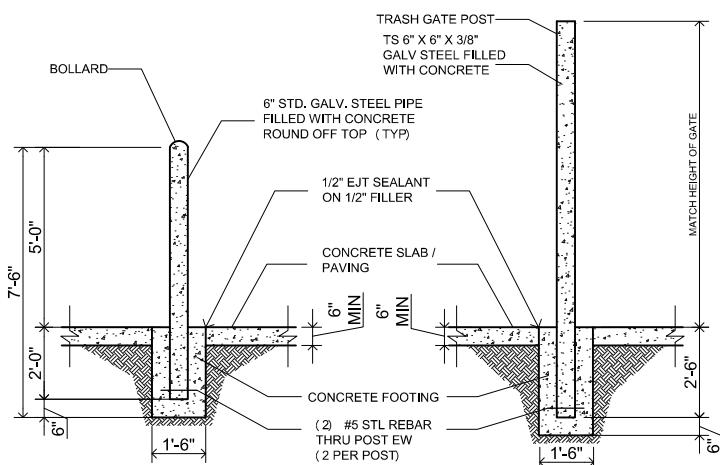


**BOLLARD/POST  
BASE**

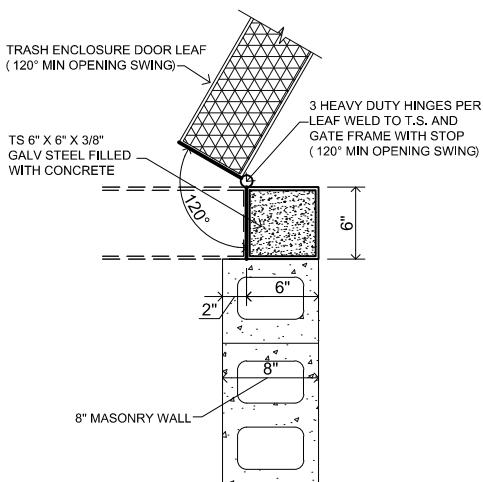

**HINGE DETAIL**

SCALE: 3/4" = 1'

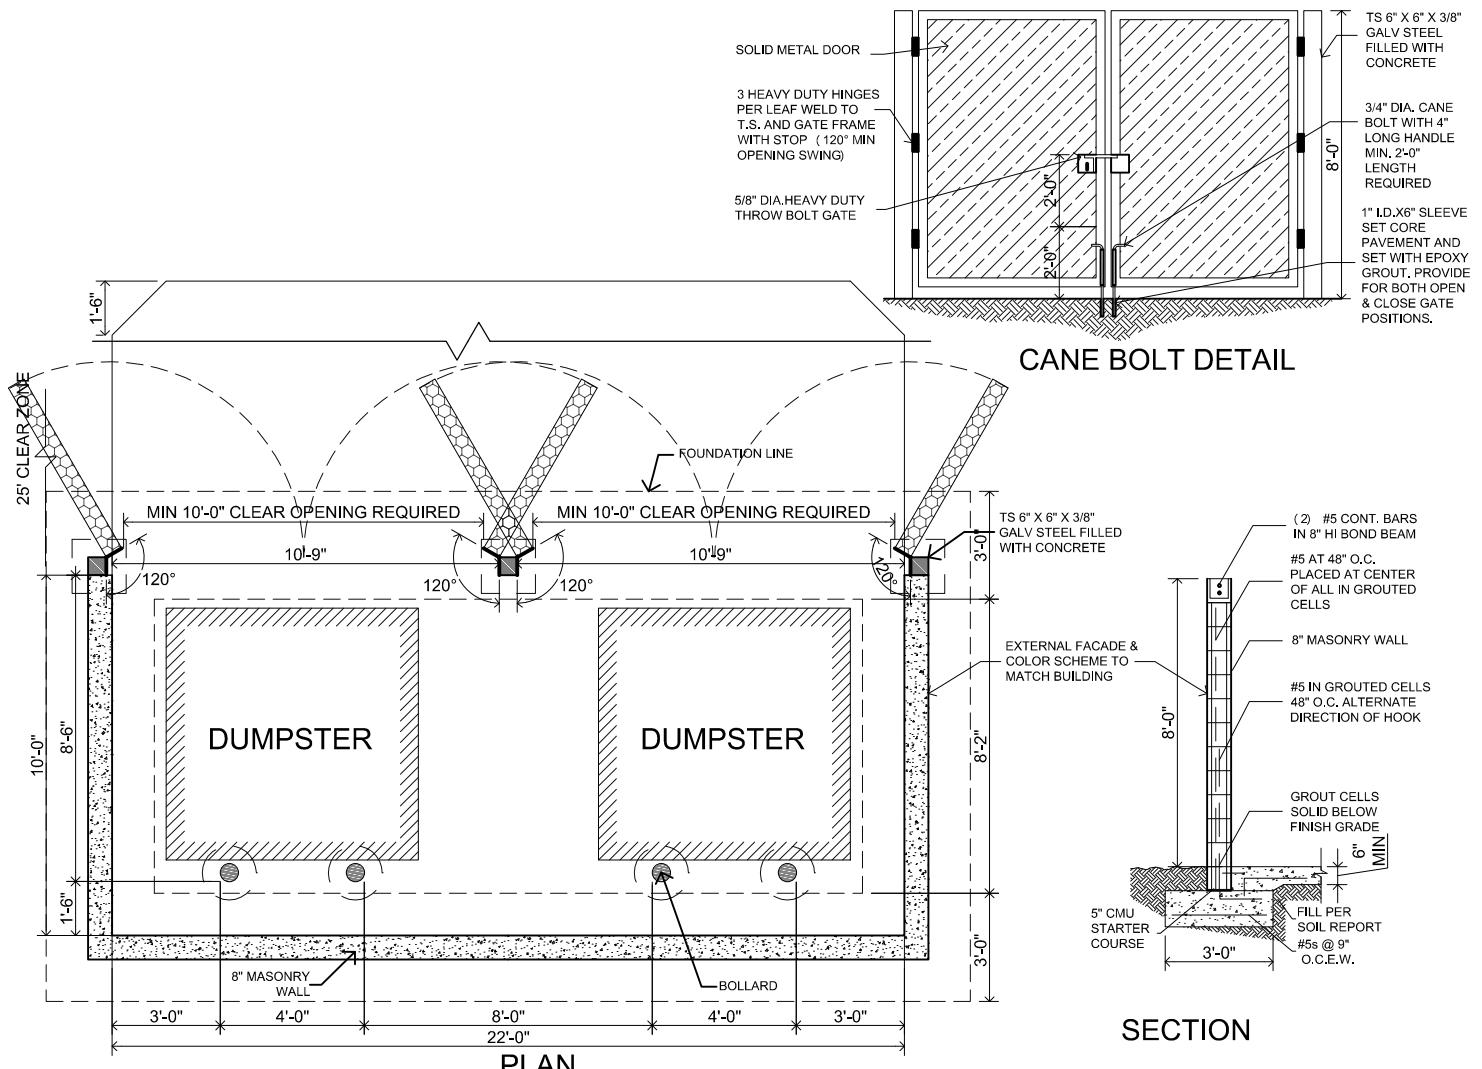

**PLAN**

**The information in this report is confidential and may be legally privileged. It is intended solely for the internal use of Community Waste Disposal, L.P. (CWD). Access to the information contained within this report by anyone else is unauthorized. Any disclosure, copying, distribution or action taken or omitted based on this information is prohibited and maybe unlawful.**



CommunityWasteDisposal.com  
Since 1984  
2010 California Crossing Road  
Dallas, Texas 75220-2310  
Telephone  
972.392.9300 • 817.795.9300  
972.392.9301

**DOUBLE DUMPSTER**

**AUGUST 23 2018**


**GUIDELINES  
SCALE: 3/16" = 1"**

**SRG Architects, LLC**

TBAE FIRM #B2 2117  
www.sanroggroup.com  
Ph: 682.708.3161  
6421 Camp Bowie Blvd., Suite 312  
Fort Worth, Texas 76116

Copyright © 2018 SRG Architects, LLC



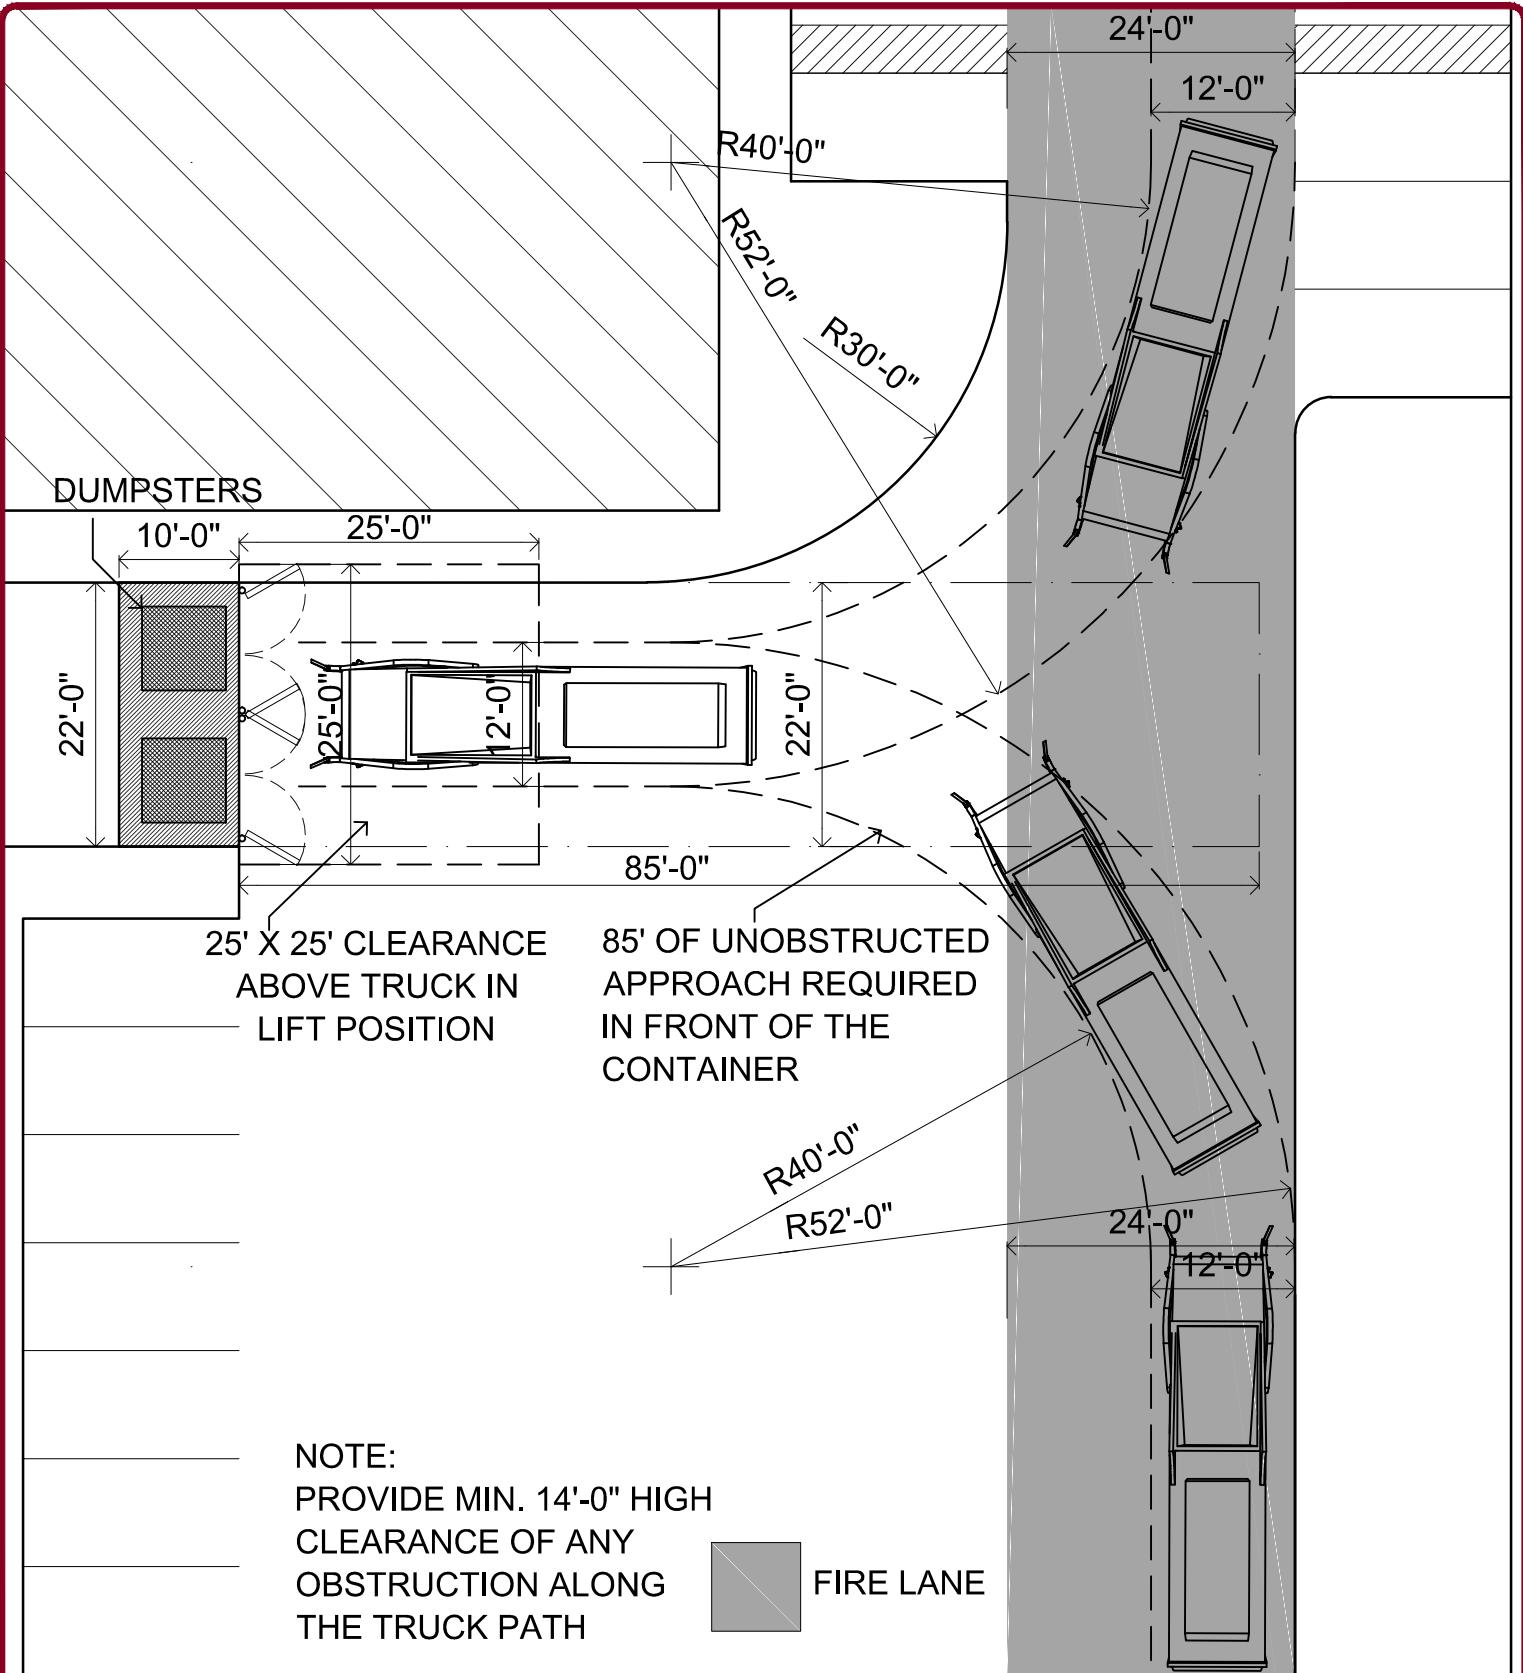

The information in this report is confidential and may be legally privileged. It is intended solely for the internal use of Community Waste Disposal, L.P. (CWD). Access to the information contained within this report by anyone else is unauthorized. Any disclosure, copying, distribution or action taken or omitted based on this information is prohibited and maybe unlawful.



Community Waste Disposal.com  
Since 1984  
2010 California Crossing Road  
Dallas, Texas 75220-2310  
Telephone 972.392.9300 • 817.795.9300  
Facsimile 972.392.9301



**FRONT LOAD TRUCK  
TURNING RADIUS  
DOUBLE DUMPSTER**

**JUNE 28 2018**

**GUIDELINES  
SCALE: 1/16" = 1'**

**SRG Architects, LLC**  
TBAE FIRM #8R 2117  
www.sanrocgroup.com  
Ph: 882.708.3181  
6421 Camp Bowie Blvd., Suite 312  
Fort Worth, Texas 76116  
Copyright © 2018 SRG Architects, LLC



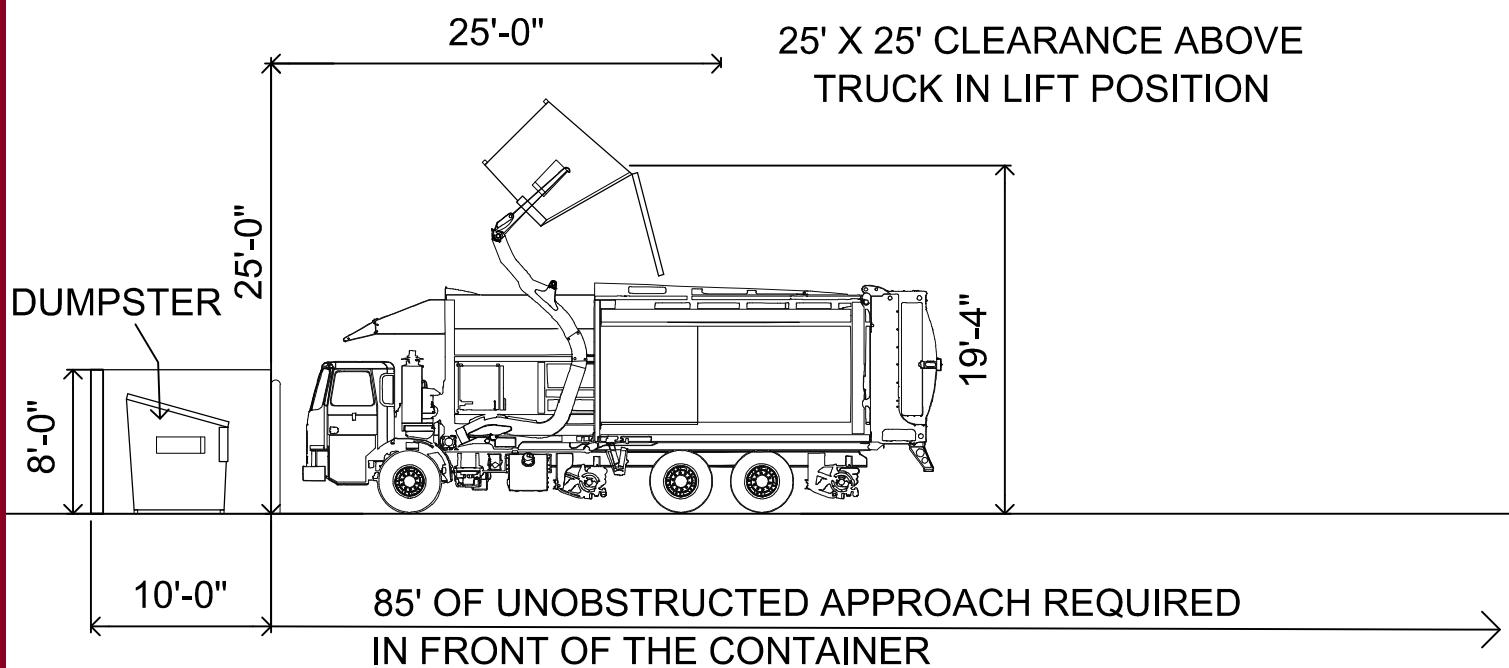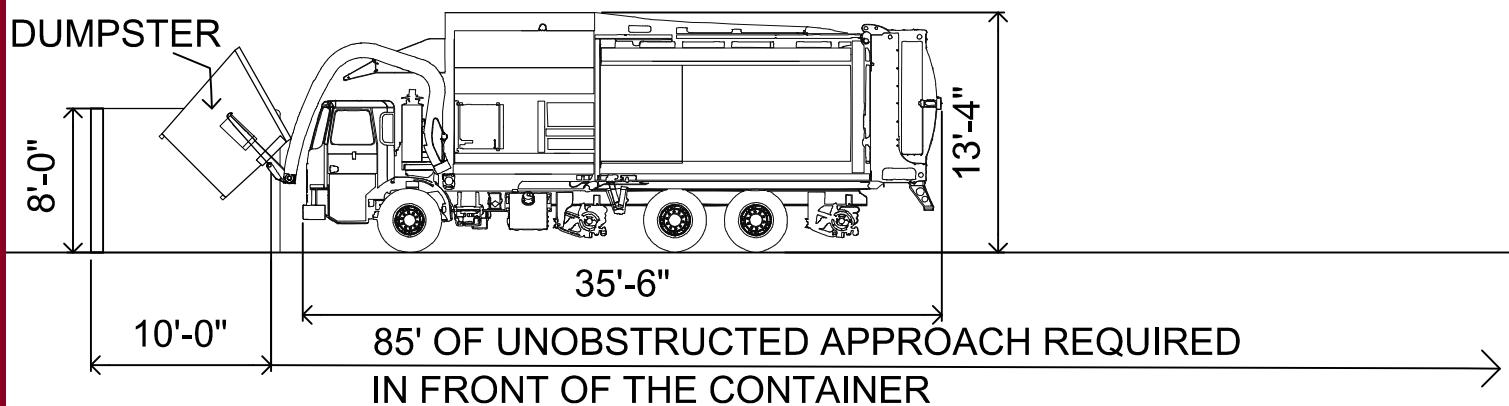

The information in this report is confidential and may be legally privileged. It is intended solely for the internal use of Community Waste Disposal, L.P. (CWD). Access to the information contained within this report by anyone else is unauthorized. Any disclosure, copying, distribution or action taken or omitted based on this information is prohibited and maybe unlawful.



Community Waste Disposal.com  
Since 1984  
2010 California Crossing Road  
Dallas, Texas 75220-2310  
telephone  
972.392.9300 - 817.795.9300  
facsimile  
972.392.9301


FRONT LOAD TRUCK SIDE ELEVATION

AUGUST 2 2018


GUIDELINES  
SCALE: 3/32" = 1"

SRG Architects, LLC  
TEAE FIRM #BR 2117  
www.sanrocgroup.com  
Ph: 682.708.3161  
6421 Camp Bowie Blvd., Suite 312  
Fort Worth, Texas 76116  
Copyright © 2018 SRG Architects, LLC




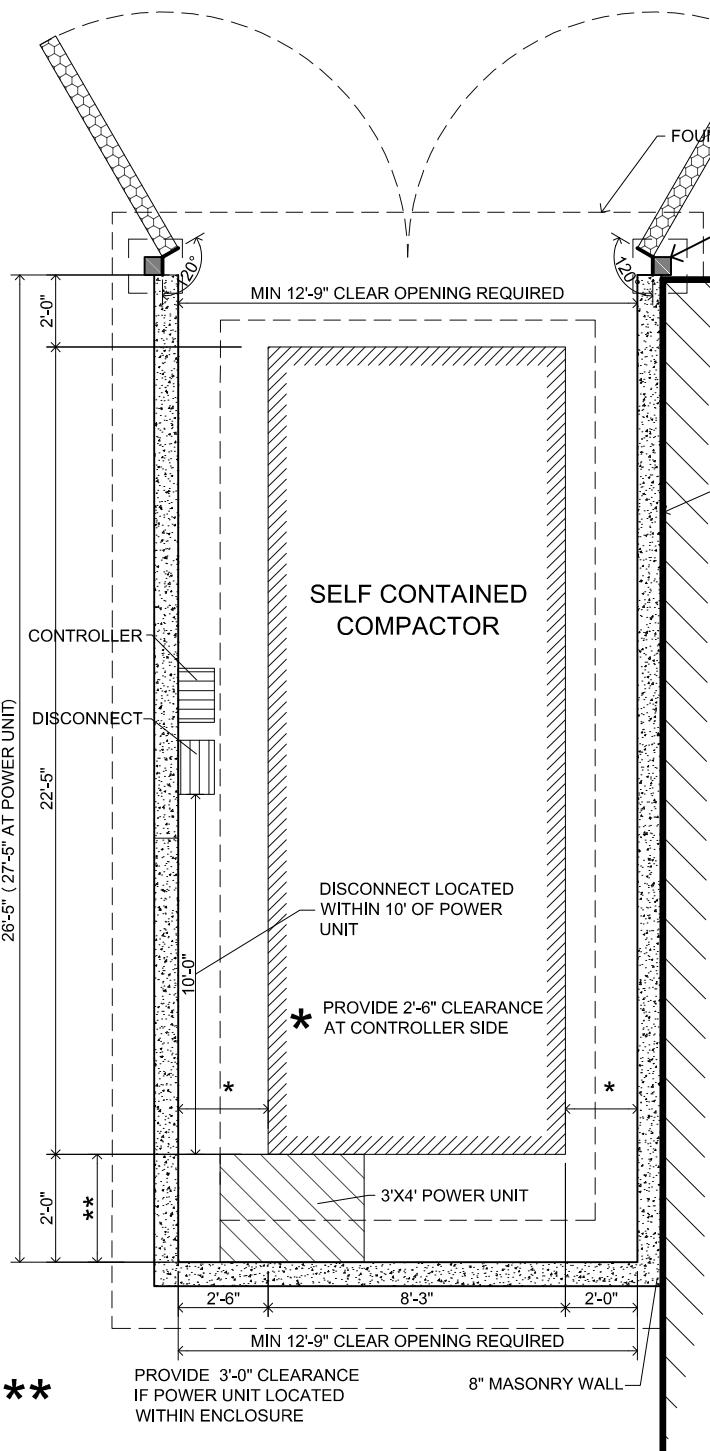


PLAN

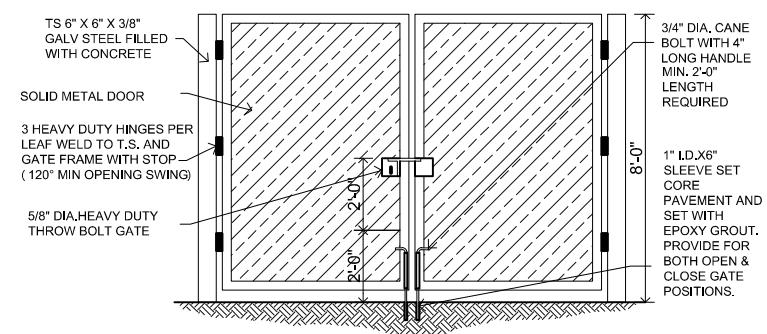

HINGE DETAIL  
SCALE: 3/4" = 1"

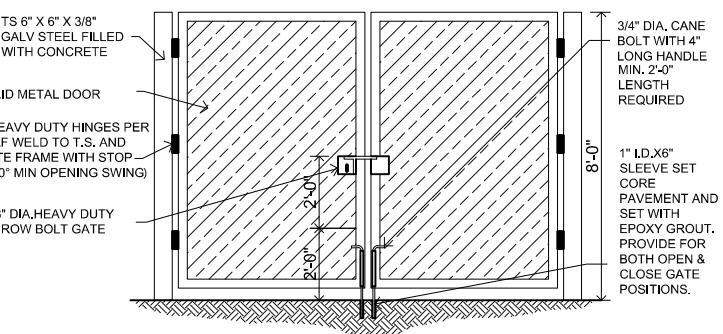

CANE BOLT DETAIL

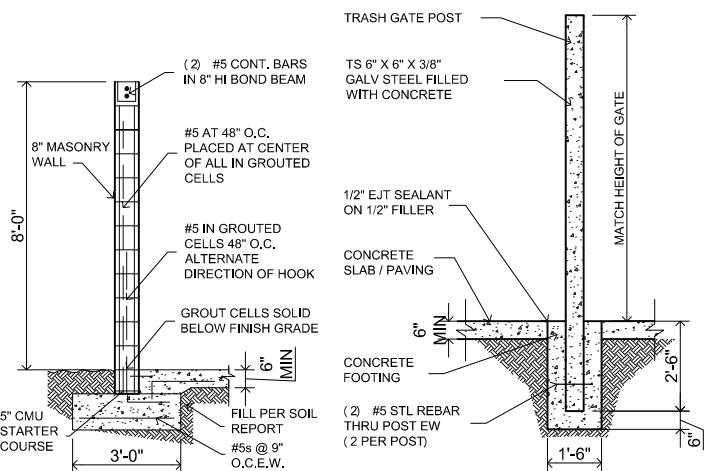

SECTION

TRASH GATE POST BASE

The information in this report is confidential and may be legally privileged. It is intended solely for the internal use of Community Waste Disposal, L.P. (CWD). Access to the information contained within this report by anyone else is unauthorized. Any disclosure, copying, distribution or action taken or omitted based on this information is prohibited and maybe unlawful.



CommunityWasteDisposal.com  
Since 1984  
2010 California Crossing Road  
Dallas, Texas 75220-2310  
Telephone  
972.392.9300 • 817.795.9300  
972.392.9301


SELF CONTAINED COMPACTOR  
ENCLOSURE PLAN

AUGUST 23 2018

GUIDELINES  
SCALE: 3/16" = 1"

SRG Architects, LLC  
TBAE FIRM #B2 2117  
www.sanroggroup.com  
Ph: 682.708.3161  
6421 Camp Bowie Blvd., Suite 312  
Fort Worth, Texas 76116  
Copyright © 2018 SRG Architects, LLC



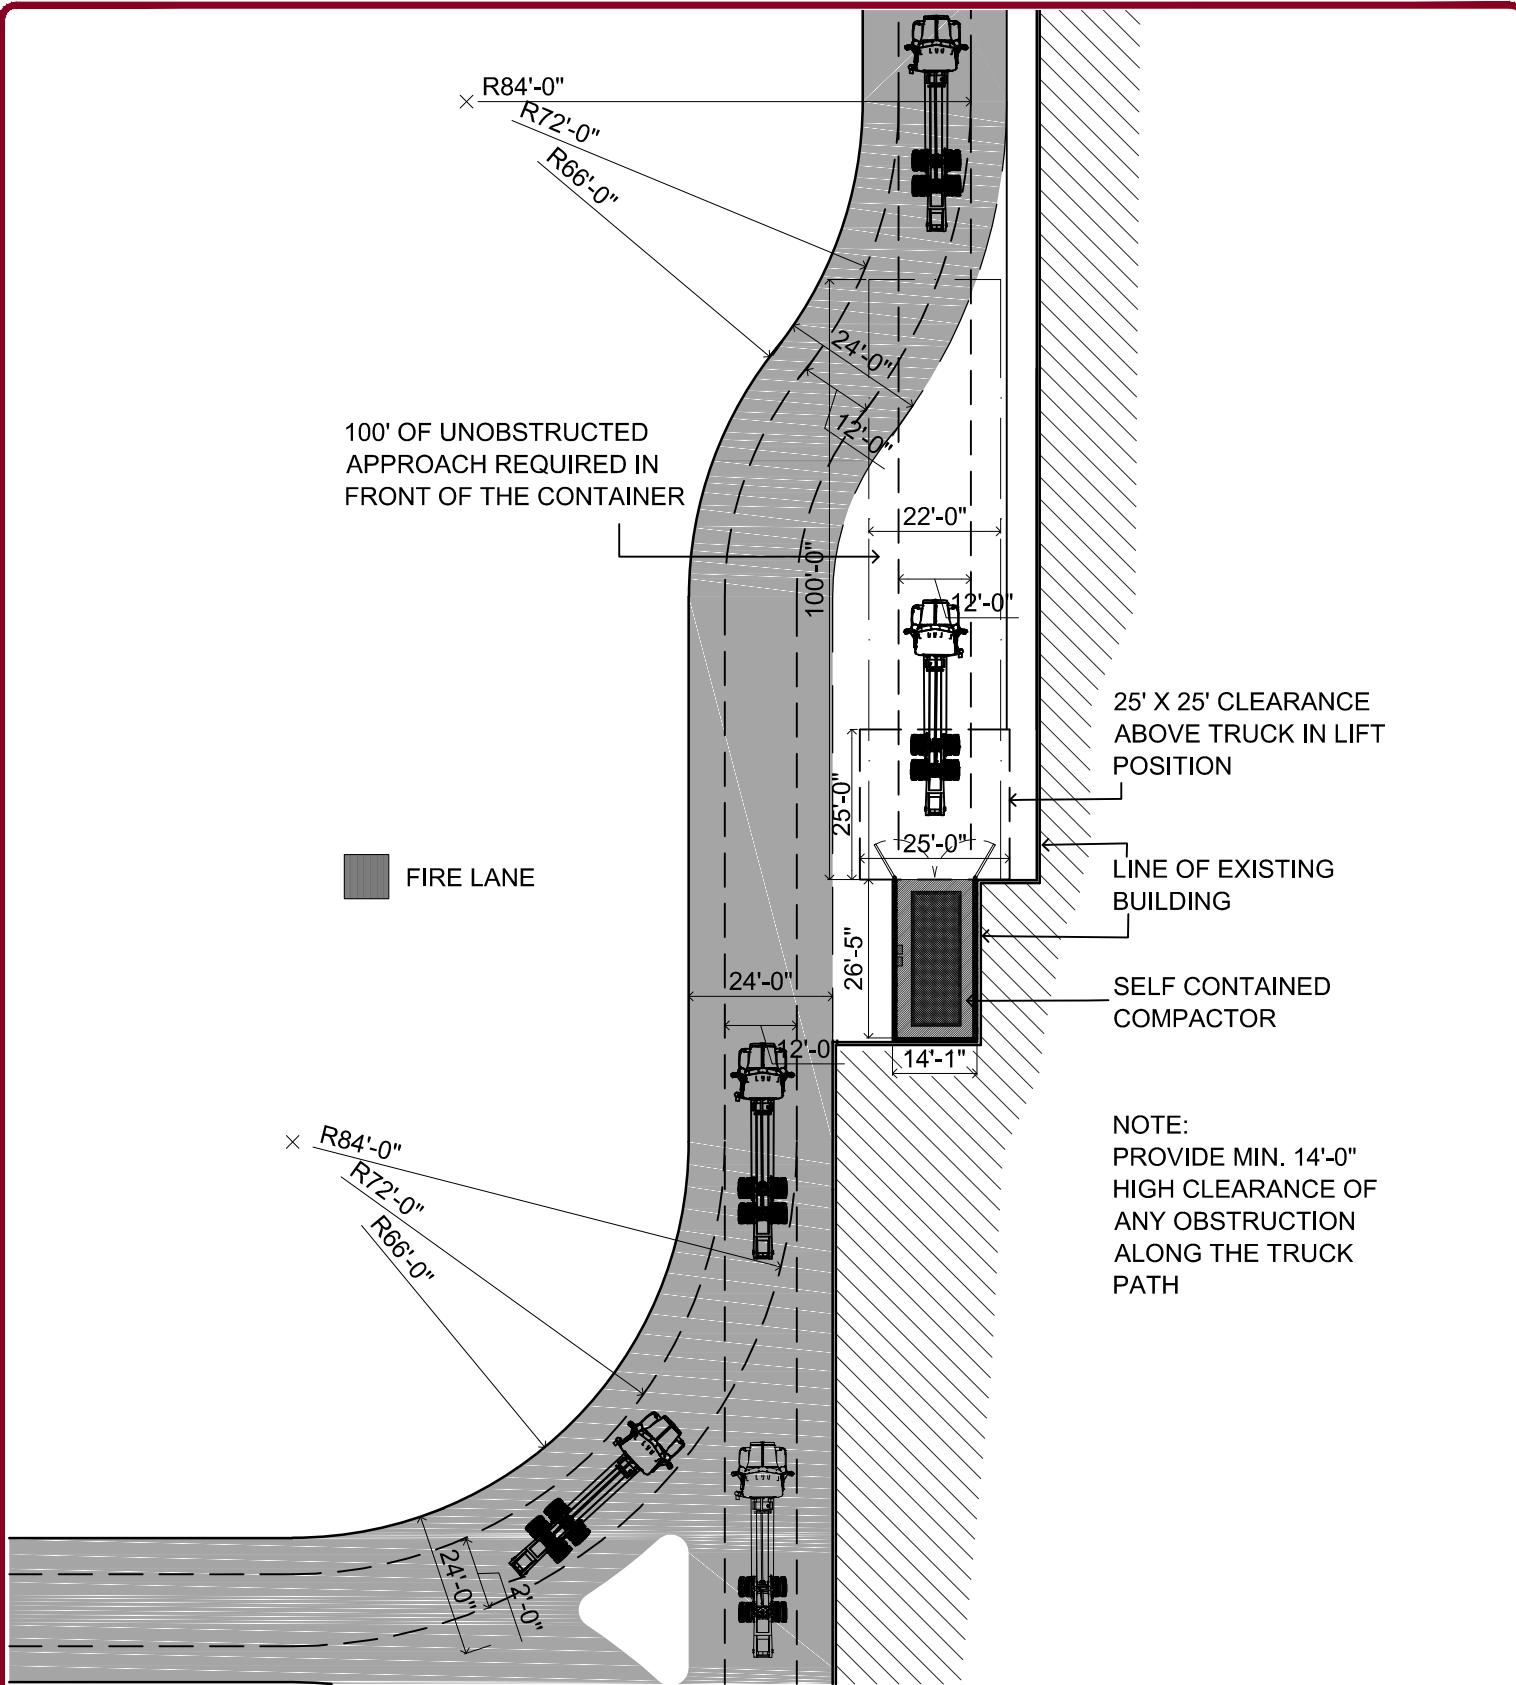

The information in this report is confidential and may be legally privileged. It is intended solely for the internal use of Community Waste Disposal, L.P. (CWD). Access to the information contained within this report by anyone else is unauthorized. Any disclosure, copying, distribution or action taken or omitted based on this information is prohibited and maybe unlawful.



Community Waste Disposal.com  
Since 1984  
2010 California Crossing Road  
Dallas, Texas 75220-2310  
Telephone: 972.392.9300 • Facsimile: 972.392.9301



#### ROLL OFF TRUCK TURNING RADIUS

JUNE 28 2018

GUIDELINES  
SCALE: 1/32" = 1'

SRG Architects, LLC  
TBIE FIRM #BR 2117  
www.srgocgroup.com  
Ph: 817.289.3116  
6421 Camp Bonham Blvd., Suite 312  
Fort Worth, Texas 76116  
Copyright © 2018 SRG Architects, LLC



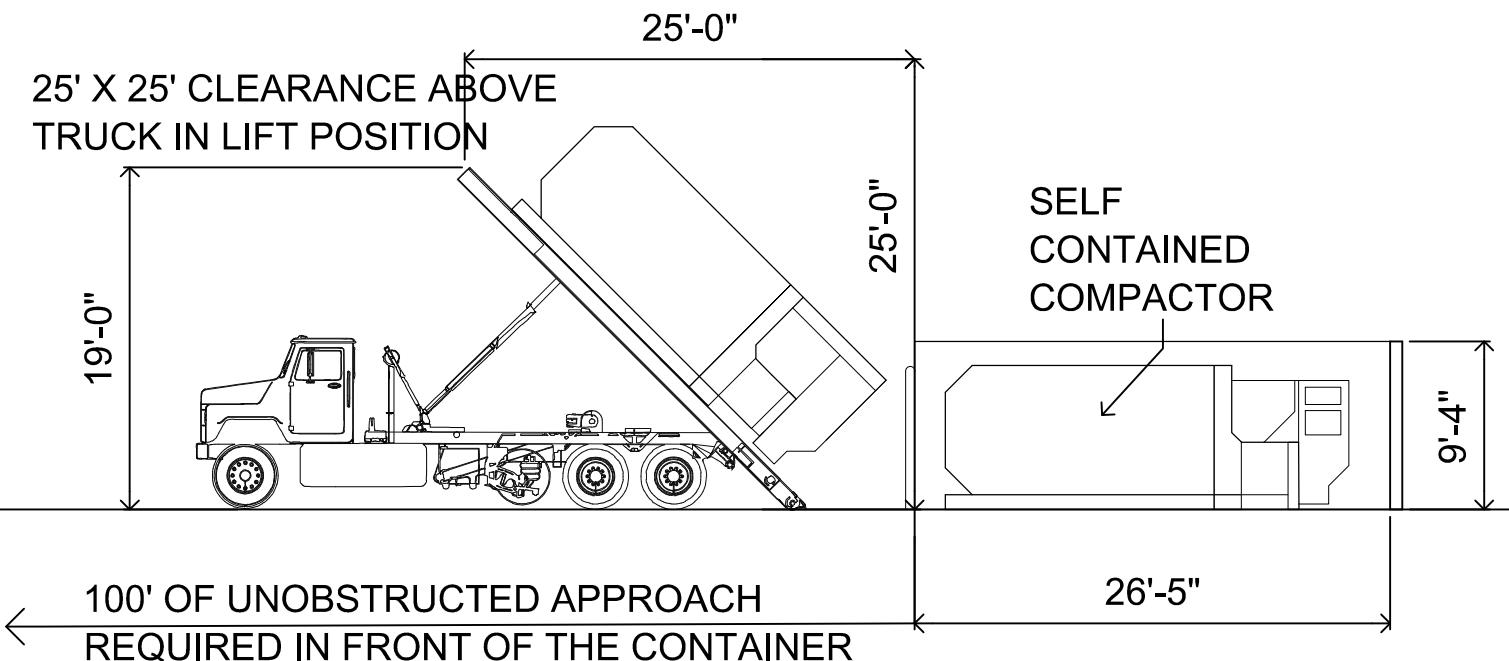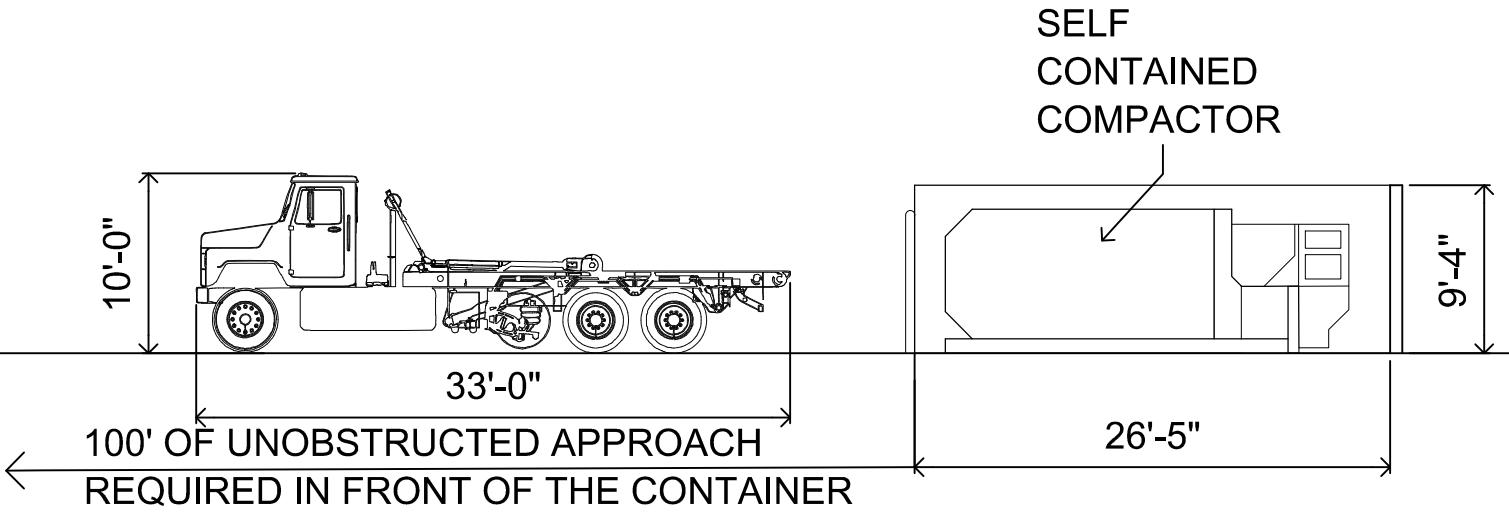

The information in this report is confidential and may be legally privileged. It is intended solely for the internal use of Community Waste Disposal, L.P. (CWD). Access to the information contained within this report by anyone else is unauthorized. Any disclosure, copying, distribution or action taken or omitted based on this information is prohibited and maybe unlawful.



Community Waste Disposal.com  
Since 1984  
2010 California Crossing Road  
Dallas, Texas 75220-2310  
telephone  
972.392.9300 - 817.795.9300  
facsimile  
972.392.9301

#### ROLL OFF TRUCK SIDE ELEVATION


AUGUST 2 2018

GUIDELINES  
SCALE: 3/32" = 1"

SRG Architects, LLC  
TEAE FIRM #BR 2117  
www.sanrocgroup.com  
Ph: 682.708.3161  
6421 Camp Bowie Blvd., Suite 312  
Fort Worth, Texas 76116  
Copyright © 2018 SRG Architects, LLC



## Self-Contained Compactors

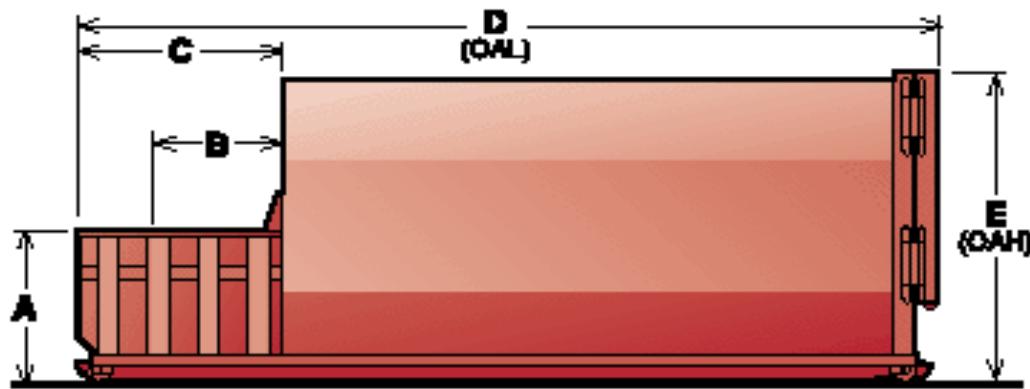

	A	B	C	D**	E	LBS.
--	---	---	---	-----	---	------

15 cu yds	4' - 0" 1219 mm	3' - 7- 1/4" 1099 mm	5' - 7- 1/2" 1715 mm	14' - 3" 4344mm	7' - 5" 2261 mm	8860 lbs. 4173 kg
-----------	--------------------	----------------------------	----------------------------	--------------------	--------------------	----------------------

20 cu yds	4' - 0" 1219 mm	3' - 7- 1/4" 1099 mm	5' - 7- 1/2" 1715 mm	17' - 4" 5284 mm	7' - 5" 2261 mm	9520 lbs. 4318 kg
-----------	--------------------	----------------------------	----------------------------	---------------------	--------------------	----------------------

25 cu yds	4' - 0" 1219 mm	3' - 7- 1/4" 1099 mm	5' - 7- 1/2" 1715 mm	17' - 10- 1/2" 5449mm	8' - 8" 2642 mm	10030 lbs. 4550 kg
-----------	--------------------	----------------------------	----------------------------	-----------------------------	--------------------	-----------------------


30 cu yds	4' - 0" 1219 mm	3' - 7- 1/4" 1099 mm	5' - 7- 1/2" 1715 mm	20' - 5" 6223 mm	8' - 8" 2642 mm	10620 lbs. 4818 kg
-----------	--------------------	----------------------------	----------------------------	---------------------	--------------------	-----------------------

35 cu yds	4' - 0" 1219 mm	3' - 7- 1/4" 1099 mm	5' - 7- 1/2" 1715 mm	22' - 5" 6833 mm	8' - 8" 2642 mm	11130 lbs. 5049 kg
-----------	--------------------	----------------------------	----------------------------	---------------------	--------------------	-----------------------

**Standard CWD Self Contained Compactor size is 35 cu yd.**

\*Sizes are approximate and may vary by manufacturer

## Stationary Compactors

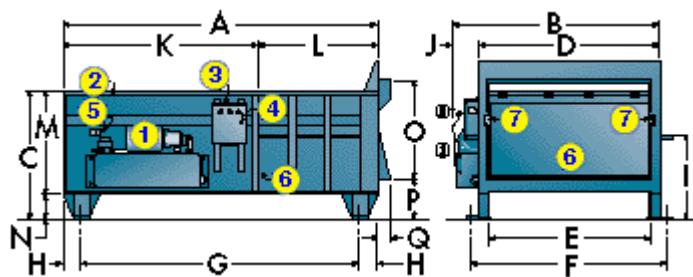

1	Side Mount Power Unit
2	Power Unit Weather Cover
3	Control Panel Box
4	Motor Starter Reset Button
5	Limit Switch
6	Ram
7	Ram Guide Shoes with Replaceable Wear Strips

A                    B                    C                    D                    E                    F                    \*G                    \*H                    I

119 1/2"	79"	48 9/16"	69 1/8"	60"	75"	106 1/2"	6 1/2"	31 1/2"
----------	-----	----------	---------	-----	-----	----------	--------	---------


3035 mm	2007 mm	1233 mm	1756 mm	1524 mm	1905 mm	2705 mm	165 mm	800 mm
---------	---------	---------	---------	---------	---------	---------	--------	--------

J                    K                    L                    M                    N                    O                    P                    Q


9 1/2"	73 3/4"	45 3/4"	39 9/16"	9"	38 1/2"	14 5/8"	5"
--------	---------	---------	----------	----	---------	---------	----

241 mm	1873 mm	1162 mm	1005 mm	229 mm	978 mm	371 mm	127 mm
--------	---------	---------	---------	--------	--------	--------	--------

- At Bolt Centers (reference dimensions only)
- Sizes are approximate and may vary by manufacturer.

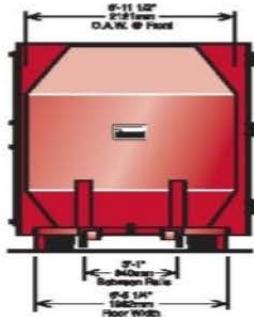


FRONT VIEW

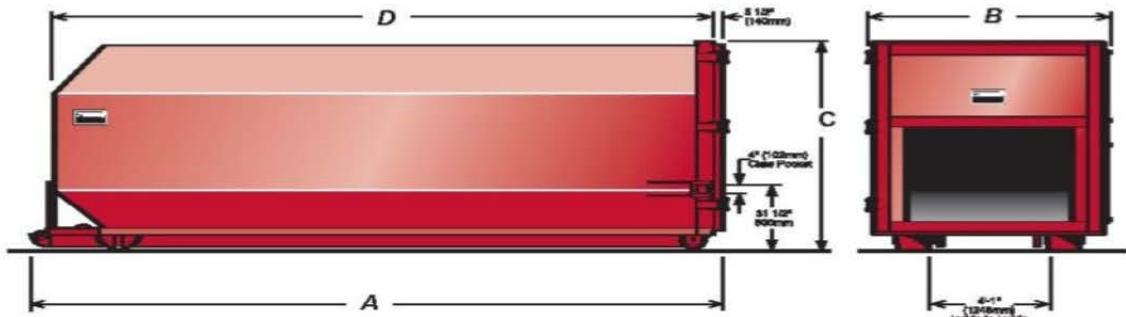

SIDE VIEW

REAR VIEW


Model No.	A	B	C	D	Capacity	Max Force Rate	Weight (Approx.)
RJ-40 OC	22'-2" (6756mm)	8'-0" (2438mm)	8'-8" (2642mm)	20'-11" (6375mm)	40 cy (31m <sup>3</sup> )	80,000 lbf (355.8 kN)	6700 lb (3039 kg)

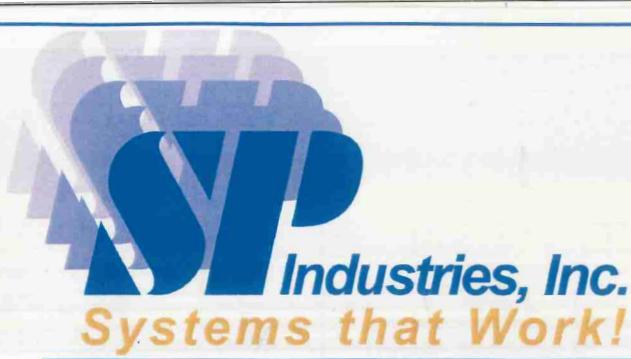

## Self-contained Roll-off Compactor / Containers



Mini-SCS system with truncated container

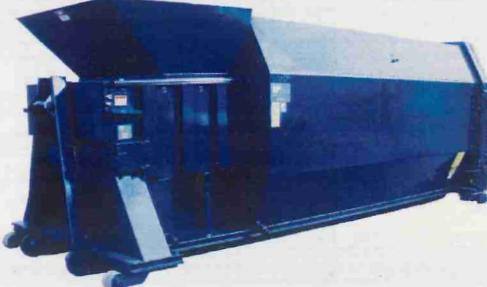

SCS model with raised compactor

- Unitized construction & adjustable door with seal retains high-liquid waste.
- Controls and reduces odor / pest problems.
- Available with 1.5 or 2 cu. yd. capacity compactor.
- Available in 16', 18', 20', 22', and 24' lengths.
- Customized loading applications with security chutes, hoppers, and decks.
- Customized designs available including space saving narrow or short container construction.
- Remote power unit.
- Secure safety door locking system with catch and cam locked, ratchet load binder.
- Oil spill pan positioned under hydraulic disconnect maintains a clean, safe working area.
- Container inspection/fire port standard.
- Double end pick-up on standard universal and deadlift understructures.
- Nylatron ram guide system.
- Conforms to current ANSI Z245 Standards.
- Industry's leading warranty program.

# Specifications

## Compactor Specifications

Model	SC	SCS
Mfr's Rating (cu. yds.)	1.5	2
WASTEC Type Rating (cubic yards)	1.03	1.57
Clear Top Opening (in.)		
Length	31	40
Width	58	56.5
Chamber Length (in.)	32	42
Ram Stroke (inches)	42	46.5
Ram Penetration (in.)	10	5.5
Force Rating (Ram PSI at Stated Forces/Lbs.)	29.5/44,200	27.6/49,200
Hydraulic System Pressure	2,250	2,250
Ram Face (inches)		
Width	60	59.5
Height	25	30
Cycle Time (seconds)	38	36
Volume Displacement (cubic yards/hour)	99	158
Motor H.P.	10	10
Pump Volume G.P.M.	10	10
Oil Reservoir (gallons)	25	25


## Material Specifications

Model	SC	SCS
<b>Compactor Frame</b>		
Floor Plate	3/8" 1045/AR 235	3/8" 1045/AR 235
Floor Plate Supports	TS 2"x 2" x 3/16" Bar 2"x 1/2"	TS 2"x 2" x 3/16" Bar 2"x 1/2"
Side Plates	1/4"	1/4"
Side Supports	6" x 2-1/2" 10 GA Formed Channel	6" x 2-1/2" 10 GA Formed Channel
Breaker Bar	L 6"x 6" x 1/2" & TS 2"x 6" x 1/4" w/Retainer Teeth	L 6"x 6" x 1/2" & TS 2"x 6" x 1/4" w/Retainer Teeth
Ram Hold Down Bars	1" x 1-1/2" Bar	1" x 1-1/2" Bar
<b>Ram</b>		
Face Plate	1/2"	1/2"
Floor Plate	1/2"	1/2"
Side Plates	1/4"	1/4"
Top Plate	1/4"	1/4"
Top Plate Supports	C 4"x 5.4#	C 4"x 5.4#
<b>Container</b>		
Floor & Side Plate	7 GA	7 GA
Floor Supports (on 20" Centers)	C 3"x 4.1#	C 3"x 4.1#
Roof Plate	10 GA	10 GA
Main Rails	TS 2"x 6" x 1/4"	TS 2"x 6" x 1/4"
Bull Nose	1-1/4" Solid Steel Burn-out	1-1/4" Solid Steel Burn-out
Wheels (4 total)	5"W x 6-5/8"D	5"W x 6-5/8"D

## Standard Controls & Features

- Cylinder(s): SC - (1) 5" Bore x 2-1/2" Rod x 42" Stroke  
SCS - (2) 4" Bore x 2-1/2" Rod x 34" Stroke
- Automatic Multicycle System  
Multi Minute Cycle Timer
- Panel Mounted: Key Locked Start Button  
Emergency Stop Button  
Reverse Button
- Tri-volt Selection (208, 230 or 460, 3 Phase)
- Pressure Switch Soft-shift System
- Monitor Gauge (Advance Full/Full Load Warning Pressure Gauge)
- Oil Suitable for Wide Temperature Range (-40° F Pour Point)
- 10' Hydraulic Hoses with Quick Disconnects
- Provisions for Quick Disconnects Mounted on Left and Right Hand Sides
- Oil Spill Pan Mounted Under Both Quick Disconnect Locations
- Oil Level Gauge with Thermometer
- 10' Power Supply Cable
- Removable Compactor Access Panel
- Nylatron Ram Guide System
- Octagon Container
- Rear Container Door: Full Seal  
Ratchet Locking System  
Heavy Duty Adjustable Hinge System
- Four Wheels with Grease Fittings
- Universal or Deadlift Understructure with Double End Pick-up
- Container Inspection Port
- Optional Features**
- Remote Control Station with 10' Cable  
Keyed Jog Controls  
Advance Full Load Indicator  
Low/Hot Oil Indicator Light with Shut-off  
Thermo Oil Heater  
TEFC Motor  
Deodorizer or Disinfectant Spray System  
Power Unit Cover with Lockable Door  
Walk-on and Heavy Duty Decks  
Safety Hand and Toe Rails  
Rear or Side Load Hoppers  
Rear or Side Load Security Chutes  
Dog House Hoppers with Interlocked Door(s)  
Container Centering Guide  
Rectangular or Special Container Style  
Double End Pick-up for Dempster and Hooklift Understructures  
Special Understructures  
Special Shortened or Cut-down Container  
Wear Strips on Main Rails  
Heavy 6" x 2" x 3/8" Main Rails  
Low Profile Compactor

# Specifications

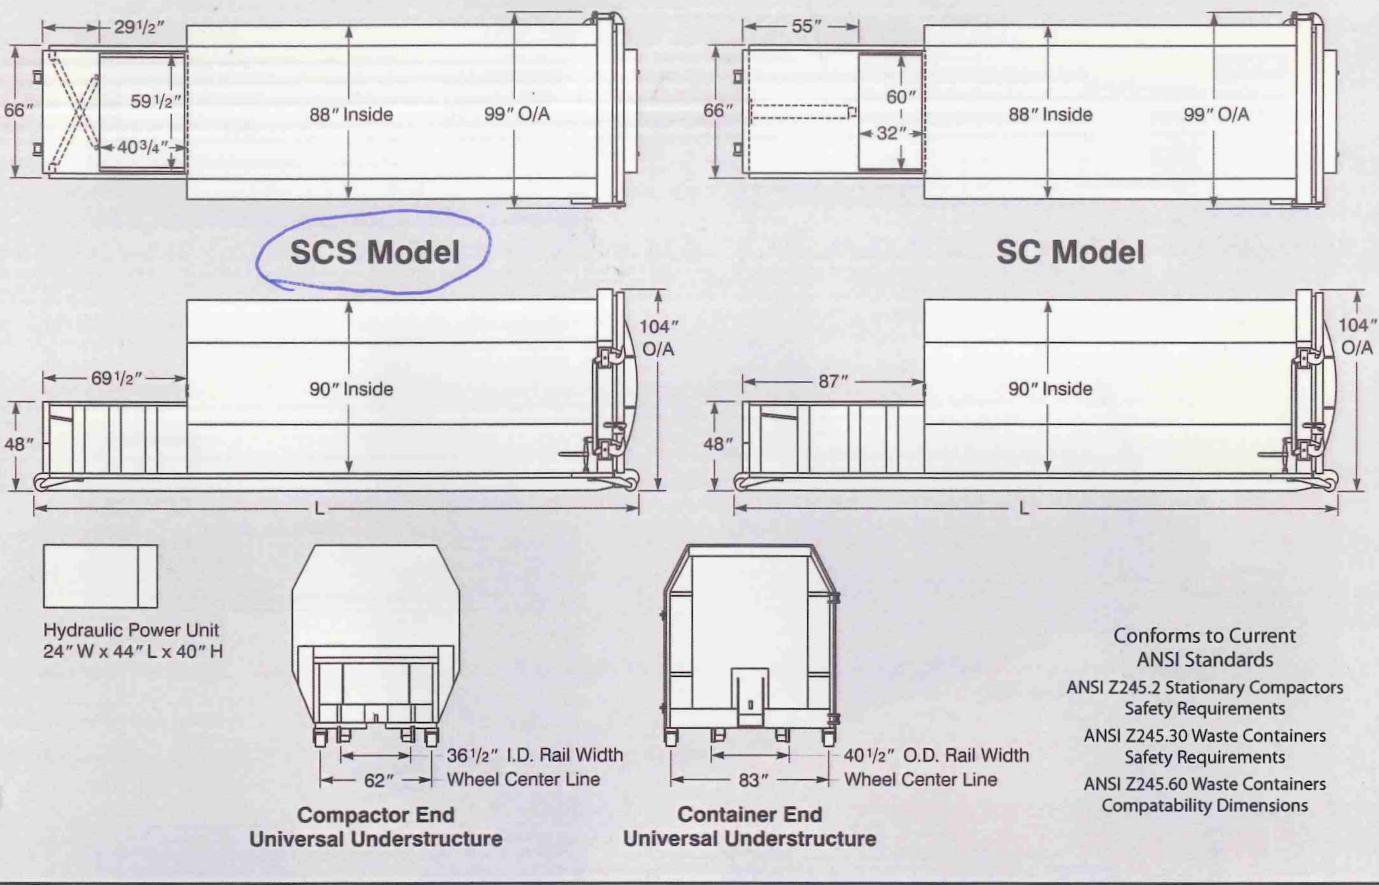


Model	SC 1619	SC 1822	SC 2026	SC 2231	SC 2435	SCS 1623	SCS 1827	SCS 2031	SCS 2235	SCS 2439
Capacity - Cubic Yards**	19	23	27	31	35	23	27	31	35	39
Compactor & Container - O/A Length (L)*										
Universal Understructure	18' 4-1/2"	20' 4-1/2"	22' 4-1/2"	24' 4-1/2"	26' 4-1/2"	18' 4-1/2"	20' 4-1/2"	22' 4-1/2"	24' 4-1/2"	26' 4-1/2"
Deadlift Understructure	18' 7"	20' 7"	22' 7"	24' 7"	26' 7"	18' 7"	20' 7"	22' 7"	24' 7"	26' 7"
Hooklift Understructure	19' 3"	21' 3"	23' 3"	25' 3"	27' 3"	19' 3"	21' 3"	23' 3"	25' 3"	27' 3"
Hooklift Understructure w/Fold-down, Compactor End Hook	19' 5"	21' 5"	23' 5"	25' 5"	27' 5"	19' 5"	21' 5"	23' 5"	25' 5"	27' 5"
Compactor & Container - Weight (Lbs.)	9,650	9,960	10,630	11,300	11,970	9,140	9,810	10,480	11,150	11,820
Remote Power Unit with Oil - Weight (Lbs.)	550	550	550	550	550	550	550	550	550	550

\* Check that the overall length of the unit does not exceed the maximum length that the hoist can haul.  
Special understructures may change the overall length of the machine, check with the factory for confirmation.

\*\* A frame pull understructure is available. It will reduce the length of the unit by 10" and the capacity by approximately 1.3 cubic yards.


**!CAUTION!** This equipment should be operated by properly trained personnel. Improper use, misuse or lack of maintenance could cause injury to people and/or property. Photos used in this brochure are illustrative only. Due to its commitment to quality SP Industries' specifications are subject to change without notice to accommodate improvements to its equipment. Information contained within this literature is intended to be the most accurate available at the time of printing.

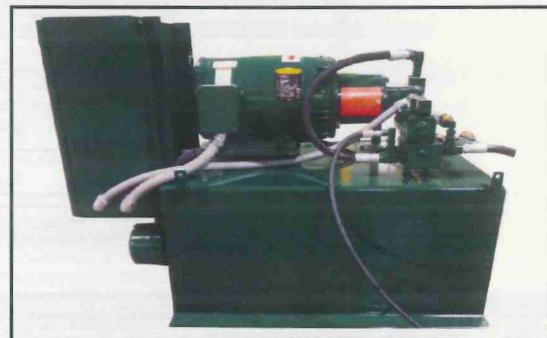

The remote power unit can be placed in any convenient location for protection from weather, accidents, and vandalism. All electrical components are UL listed.



# Typical Installations

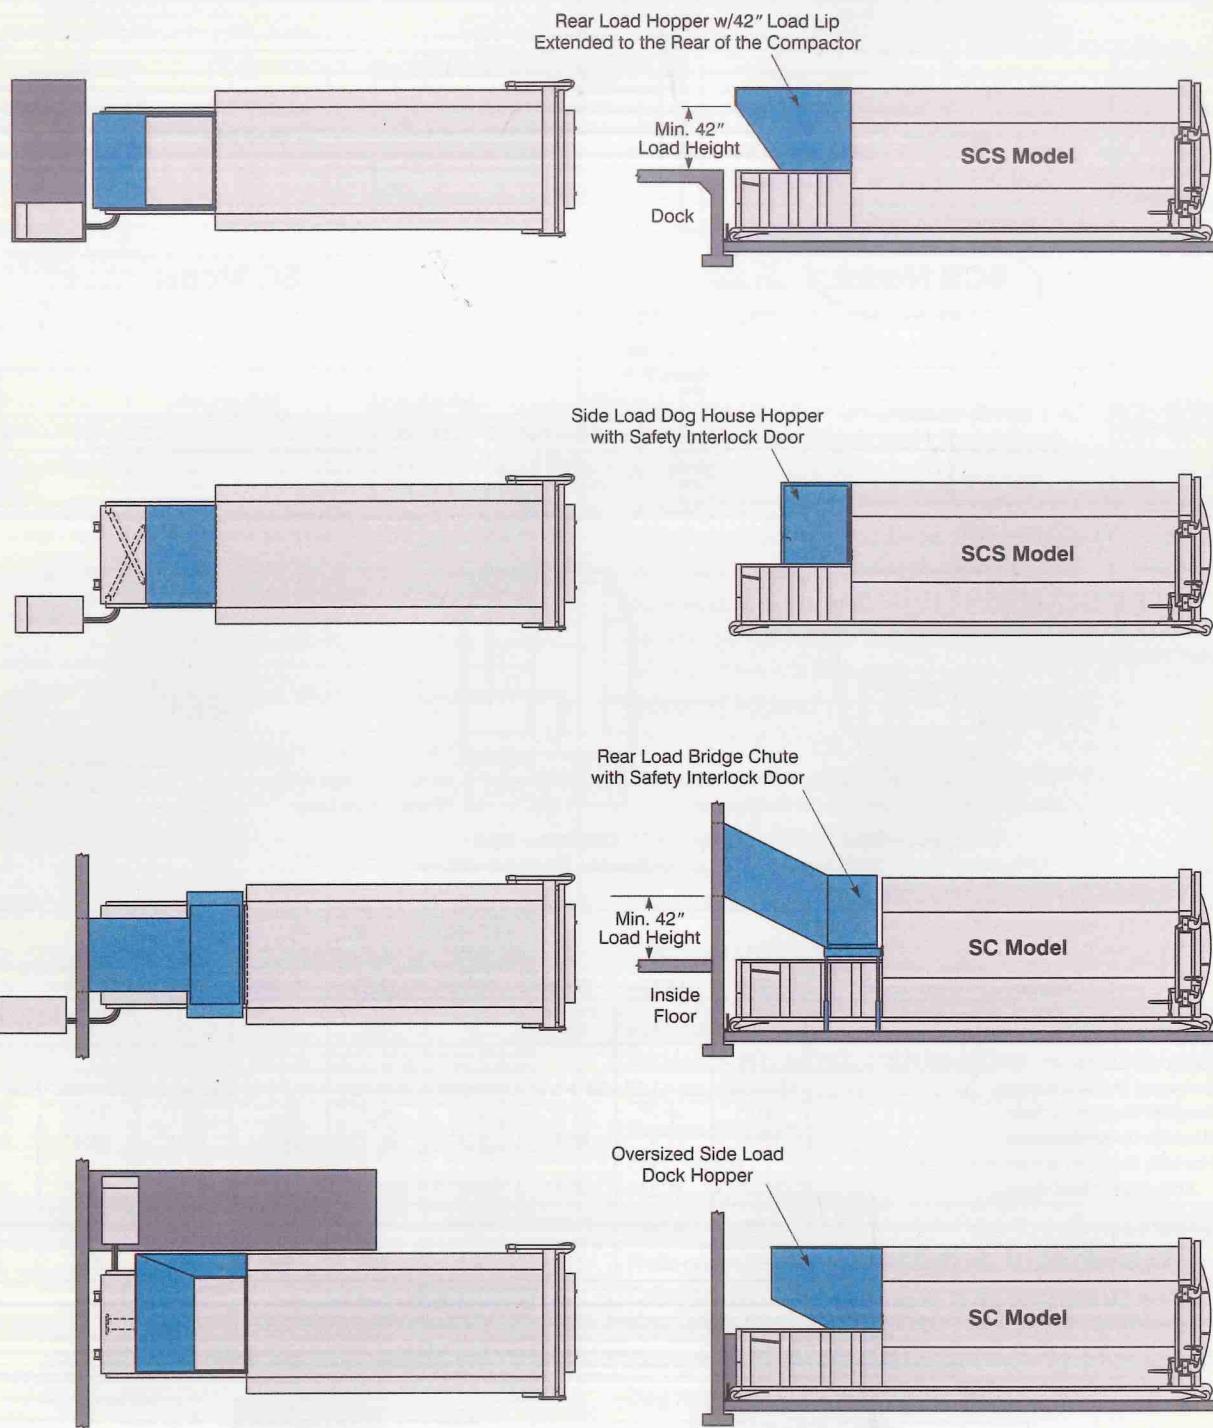

WASTE EQUIPMENT  
TECHNOLOGY ASSOCIATION



ENVIRONMENTAL INDUSTRY  
ASSOCIATIONS

Distributed By:

We are Social!



SP INDUSTRIES, INC.  
2982 Jefferson Road  
Hopkins, MI 49328

Phone: 800.592.5959 or 269.793.3232  
Fax: 269.793.3232  
Web: [www.sp-industries.com](http://www.sp-industries.com)  
Email: [info@sp-industries.com](mailto:info@sp-industries.com)

# Self Contained Compactor - Trash

Its well-engineered design, reliability and unique features make it a customer favorite.



## Equipment Description

Self contained compactors are a good solution for properties that want to limit the escape of high liquid waste while controlling odor and pest problems. Because waste is compacted, the haul frequency is much less when compared with front load service.

Optional features include a custom loading application with security chutes, hoppers, and dock-side loading. Available for rental or purchase in sizes 15-35 yards, the equipment can be customized to your business.

## Service

Services are available Monday through Saturday and may be requested by calling the CWD Customer Service Department at 972.392.9300, Option 2. A representative will schedule pickups, repairs, cleanings, and more. For pricing or an increase or decrease in service, please contact your CWD Sales Rep directly.

## Installation

A **Quick Disconnect Box** must be provided within 10 feet of the compactor. In addition, one of the following is required:

- 460 volt, 3 phase, with 35 amp breaker, or
- 230 volt, 3 phase with 70 amp breaker, or
- 208 volt, 3 phase with 80 amp breaker, or
- 230 volt, single phase with 125 amp breaker

## Equipment Delivery, Certification & Maintenance

Whether it is purchased or rented from CWD, the equipment will be custom designed for your business. All equipment meets OSHA and UL requirements. CWD will provide any maintenance or equipment needed during the rental agreement term.